

ESTABLISHING A **NEW STANDARD** IN THE COMMERCIAL REFRIGERATION INDUSTRY.

WITH ITS **LARGE CAPACITY**, THIS COOLER IS IDEAL FOR PRODUCT DISPLAYS IN **LARGE SPACES**.



## ➤ KEY FEATURES

### • **BMAD Refrigeration System**

Ensures rapid and effective cabinet cool down and maintains consistent temperature range with minimum energy consumption

### • **Electronic Temperature Controller**

Assures the optimal performance of the cooler, delivering product temperature ideal for consumption.

### • **High Efficiency Glass Door**

Equipped with double panel glass and low-e film to reduce condensation. Door hinge is equipped with a self-closing system to ensure the door closes safely, and returns to original position, without any damages.

### • **LED Lighting System**

Our LED system uses a fraction of the energy of regular fluorescent lights and requires no replacement for up seven years.

### • **CFC and HFC Free Cyclopentane Foam**


Eco-friendly, recyclable and high efficiency cabinet insulation.

### • **Electronic Fan Motors**


Enhances performance and efficiency. Uses only a fraction of the energy than industry standard shaded-pole motor requires. Longer lifespan fan motor.

ESTABLISHING A **NEW STANDARD** IN THE COMMERCIAL REFRIGERATION INDUSTRY.

## PRODUCT VIEWS



TOP VIEW

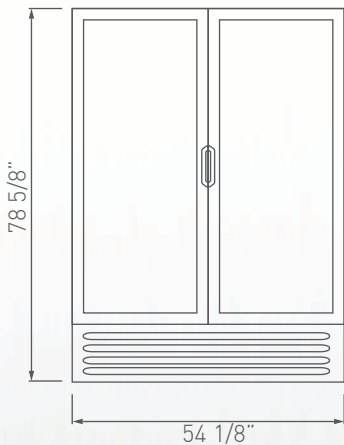

FRONT VIEW



SIDE VIEW

## TECHNICAL SPECIFICATIONS

| Exterior Dimensions | W: | 54 1/8" | 1375 mm |
|---------------------|----|---------|---------|
|                     | D: | 29 3/4" | 756 mm  |
|                     | H: | 78 5/8" | 1997 mm |

| Interior Dimensions | W: | 50"     | 1270 mm |
|---------------------|----|---------|---------|
|                     | D: | 24 7/8" | 633 mm  |
|                     | H: | 59 5/8" | 1515 mm |

| Dimensions w/packaging | W: | 56 1/2" | 1434 mm |
|------------------------|----|---------|---------|
|                        | D: | 31 3/8" | 798 mm  |
|                        | H: | 82 1/2" | 2097 mm |

| Shelf Size | W: | 24 1/4" | 615 mm |
|------------|----|---------|--------|
|            | D: | 19 3/4" | 501 mm |

|                           |           |          |
|---------------------------|-----------|----------|
| <b>Weight</b>             | 482.8 Lbs | 219.0 kg |
| <b>Weight w/packaging</b> | 501.8 Lbs | 227.6 kg |

|                |    |
|----------------|----|
| <b>Shelves</b> | 10 |
|----------------|----|

|                       |                 |     |
|-----------------------|-----------------|-----|
| <b>Capacity 20oz.</b> | <b>Flat:</b>    | 560 |
|                       | <b>Gravity:</b> | 560 |

## REFRIGERATION DATA

|                           |               |
|---------------------------|---------------|
| <b>Energy Consumption</b> | 5.506 kWh/day |
|---------------------------|---------------|

|                |        |
|----------------|--------|
| <b>Voltage</b> | 115/60 |
|----------------|--------|

|                    |     |
|--------------------|-----|
| <b>Horse Power</b> | 1/2 |
|--------------------|-----|

|             |      |
|-------------|------|
| <b>AMPS</b> | 10.7 |
|-------------|------|

## LOGISTIC

|                      |      |    |
|----------------------|------|----|
| <b>Trailer Loads</b> | 40': | 24 |
|                      | 53': | 30 |

|                       |         |   |
|-----------------------|---------|---|
| <b>Certifications</b> | UL:     | ✓ |
|                       | ES:     | ✓ |
|                       | UL/EPH: | ✓ |

### Warranty:

Three year limited warranty on all parts and labor, an additional two year warranty on compressor. (USA and Canada only)

Dimensions rounded up to the nearest inch or millimeter. Specifications subject to change without notice.

Customer Service: 866-363-0079 | [WWW.IMBERAFOODSERVICE.COM](http://WWW.IMBERAFOODSERVICE.COM)

\* Energy consumption based on ANSI/ASHRAE Standard 72-2005.

BMAD System (Low maintenance high performance). Dimensions rounded up to the nearest inch or millimeter. Specifications subject to change without notice.