

ESTABLISHING A **NEW STANDARD** IN THE COMMERCIAL REFRIGERATION INDUSTRY.

WITH ADDED **HEALTH LOCK TIMER**, THIS FREEZER DISPLAYS YOUR FROZEN PRODUCT BEAUTIFULLY MAKING IT **IDEAL FOR MICROMARKET LOCATIONS**



KEY FEATURES

• **BMAD Refrigeration System**

Ensures rapid and effective cabinet cool down and maintains consistent temperature range with minimum energy consumption

• **Intelligent Control System CIF**

This intelligent control efficiently manages cooler temperatures based on surrounding conditions and self-adjusts to the correct temperature at any given time.

• **High Efficiency Glass Door**

Equipped with double panel glass and low-e film to reduce condensation. Door hinge is equipped with a self-closing system to ensure the door closes safely, and returns to original position, without any damages.

• **LED Lighting System**

Our LED system uses a fraction of the energy of regular fluorescent lights and requires no replacement for up seven years.

• **CFC and HFC Free Cyclopentane Foam**

Eco-friendly, recyclable and high efficiency cabinet insulation.


• **Electronic Fan Motors**

Enhances performance and efficiency. Uses only a fraction of the energy than industry standard shaded-pole motor requires. Longer lifespan fan motor.




ESTABLISHING A **NEW STANDARD** IN THE COMMERCIAL REFRIGERATION INDUSTRY.


PRODUCT VIEWS



TOP VIEW

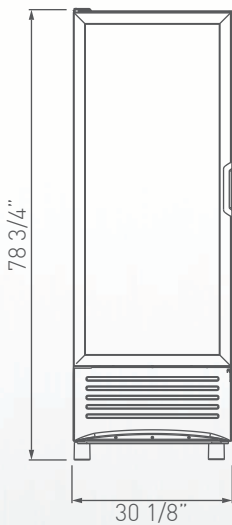

FRONT VIEW

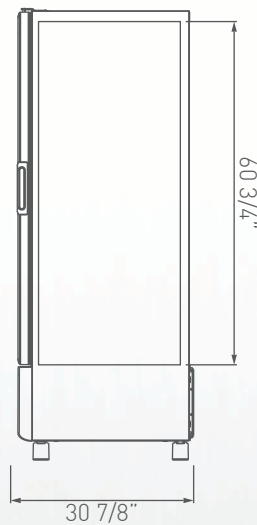

SIDE VIEW

Warranty:

Three year limited warranty on all parts and labor, an additional two year warranty on compressor. (USA and Canada only)

Dimensions rounded up to the nearest inch or millimeter.
Specifications subject to change without notice.

Customer Service: 866-363-0079 | WWW.IMBERAFOODSERVICE.COM

TECHNICAL SPECIFICATIONS

Exterior Dimensions	W:	30 1/8"	765 mm
	D:	30 7/8"	785 mm
	H:	78 3/4"	2000 mm

Exterior Dimensions (w/lock)	W:	31 1/8"	790 mm
	D:	30 7/8"	785 mm
	H:	78 3/4"	2000 mm

Interior Dimensions	W:	26 1/2"	672 mm
	D:	25 3/8"	646 mm
	H:	60 3/4"	1544 mm

Dimensions w/packaging	W:	32 1/4"	820 mm
	D:	29 7/8"	760 mm
	H:	82 5/8"	2100 mm

Shelf Size	W:	25 3/4"	653 mm
	D:	21 1/4"	541 mm

Weight	378.0 Lbs	171.0 kg
Weight w/packaging	394.6 Lbs	179.0 kg

Shelves	5
----------------	---

REFRIGERATION DATA

Energy Consumption	10.220 kWh/day
---------------------------	----------------

Voltage	115/60
----------------	--------

Horse Power	3/4
--------------------	-----

AMPS	7.0
-------------	-----

LOGISTIC

Trailer Loads	40':	28
	53':	36

Certifications	UL:	✓
	ES:	✓
	UL/EPH:	✓
	NAMA:	✓

* Energy consumption based on ANSI/ASHRAE Standard 72-2005.

BMAD System (Low maintenance high performance).
Dimensions rounded up to the nearest inch or millimeter.
Specifications subject to change without notice.

ESTABLISHING A **NEW STANDARD** IN THE COMMERCIAL REFRIGERATION INDUSTRY.

HEALTH TIMER ENSURES FREEZER WILL **LOCK** IF THE TEMPERATURE REMAINS **ABOVE 0.4°F** FOR LONGER THAN **15 MINUTES**.



KEY FEATURES

• Triteq Fresh IQ lock

- Designed and manufactured by Imbera and Triteq, leaders in intelligent freezers and vending security solutions.
- Compatible with any Triteq or P1 key and AutoTraq

• Primary functions and capability

- Automatically locks when consumer protection is required.
- Automatically locks when temperature probe failure is detected.
- Automatically locks within 2 minutes of AC power loss, and remains locked if power is not restored before a Temp lock-out event. After AC power is restored, device will automatically unlock, if Temp Lock-out did not occur.
- Can be locked and unlocked independent of health timer.
- Tamperproof electronic key for safety.
- Alerts for lock activity.

• Health lock

- Prevents dispensing food that is not at a safe temperature.
- Health timer ensures that lock will be engaged, if temperature remains above 0.4°F for longer than 15 minutes.

• Certifications,

- UL ✓
- NAMA ✓

An easy access, hidden test switch is provided for compliance with Health Department inspection procedures.

