

ESTABLISHING A **NEW STANDARD** IN THE COMMERCIAL REFRIGERATION INDUSTRY.

A **SMALL COUNTERTOP**, IDEAL FOR PROMOTIONS AND NEW PRODUCT **LAUNCHES**.



## ➤ KEY FEATURES

- **PA Refrigeration System**

Ensures rapid and effective cabinet cool down and maintains consistent temperature range with minimum energy consumption

- **Electronic Temperature Controller**

Assures the optimal performance of the cooler, delivering product temperature ideal for consumption.

- **High Efficiency Glass Door**

Equipped with double panel glass and low-e film to reduce condensation. Door hinge is equipped with a self-closing system to ensure the door closes safely, and returns to original position, without any damages.

- **LED Lighting System**


Our LED system uses a fraction of the energy of regular fluorescent lights and requires no replacement for up seven years.

- **CFC and HFC Free Cyclopentane Foam**

Eco-friendly, recyclable and high efficiency cabinet insulation.

ESTABLISHING A **NEW STANDARD** IN THE COMMERCIAL REFRIGERATION INDUSTRY.


## PRODUCT VIEWS



**TOP VIEW**



**FRONT VIEW**

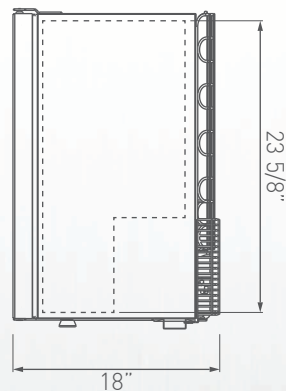

**SIDE VIEW**

### Warranty:

Three year limited warranty on all parts and labor, an additional two year warranty on compressor. (USA and Canada only)

Dimensions rounded up to the nearest inch or millimeter. Specifications subject to change without notice.

Customer Service: 866-363-0079 | [WWW.IMBERAFOODSERVICE.COM](http://WWW.IMBERAFOODSERVICE.COM)

## TECHNICAL SPECIFICATIONS

| Exterior Dimensions | W: | 14"     | 355 mm |
|---------------------|----|---------|--------|
|                     | D: | 18"     | 458 mm |
|                     | H: | 27 7/8" | 709 mm |

| Interior Dimensions | W: | 11"     | 280 mm |
|---------------------|----|---------|--------|
|                     | D: | 12 1/4" | 312 mm |
|                     | H: | 23 5/8" | 599 mm |

| Dimensions w/packaging | W: | 16 7/8" | 430 mm |
|------------------------|----|---------|--------|
|                        | D: | 22 1/2" | 570 mm |
|                        | H: | 27 7/8" | 709 mm |

| Shelf Size (small) | W: | 9 7/8" | 251 mm |
|--------------------|----|--------|--------|
|                    | D: | 6"     | 151 mm |

| Shelf Size (regular) | W: | 9 7/8" | 251 mm |
|----------------------|----|--------|--------|
|                      | D: | 11"    | 280 mm |

|                           |          |         |
|---------------------------|----------|---------|
| <b>Weight</b>             | 58.0 Lbs | 26.3 kg |
| <b>Weight w/packaging</b> | 61.3 Lbs | 27.8 kg |

|                |   |
|----------------|---|
| <b>Shelves</b> | 3 |
|----------------|---|

|                       |                 |
|-----------------------|-----------------|
| <b>Capacity 20oz.</b> | <b>Flat:</b> 15 |
|-----------------------|-----------------|

## REFRIGERATION DATA

|                           |                |
|---------------------------|----------------|
| <b>Energy Consumption</b> | 1.070 KwHr/Day |
|---------------------------|----------------|

|                |        |
|----------------|--------|
| <b>Voltage</b> | 115/60 |
|----------------|--------|

|                    |      |
|--------------------|------|
| <b>Horse Power</b> | 1/10 |
|--------------------|------|

|             |     |
|-------------|-----|
| <b>AMPS</b> | 1.7 |
|-------------|-----|

## LOGISTIC

|                      |          |
|----------------------|----------|
| <b>Trailer Loads</b> | 40': 216 |
|                      | 53': 288 |

|                       |           |
|-----------------------|-----------|
| <b>Certifications</b> | UL: ✓     |
|                       | ES: ✓     |
|                       | UL/EPH: ✓ |

\* Energy consumption based on ANSI/ASHRAE Standard 72-2005.

PA System (Active sides).

Dimensions rounded up to the nearest inch or millimeter. Specifications subject to change without notice.