


ESTABLISHING A **NEW STANDARD** IN THE COMMERCIAL REFRIGERATION INDUSTRY.

ITS **INNOVATIVE DESIGN** AND **LARGE CAPACITY** MAKE IT IDEAL FOR KITCHENS.

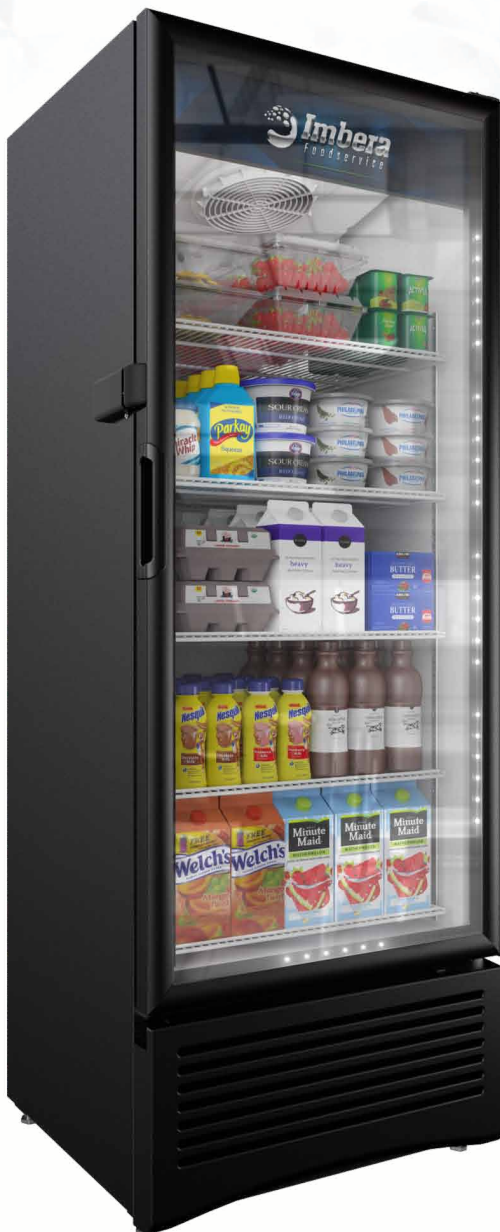

➤ KEY FEATURES

• **BMAD Refrigeration System**

Ensures rapid and effective cabinet cool down and maintains consistent temperature range with minimum energy consumption

• **Electronic Temperature Controller**

Assures the optimal performance of the cooler, delivering product temperature ideal for consumption.

• **High Efficiency Glass Door**

Equipped with double panel glass and low-e film to reduce condensation. Door hinge is equipped with a self-closing system to ensure the door closes safely, and returns to original position, without any damages.

• **LED Lighting System**

Our LED system uses a fraction of the energy of regular fluorescent lights and requires no replacement for up seven years.

• **CFC and HFC Free Cyclopentane Foam**

Eco-friendly, recyclable and high efficiency cabinet insulation.

• **Electronic Fan Motors**


Enhances performance and efficiency. Uses only a fraction of the energy than industry standard shaded-pole motor requires. Longer lifespan fan motor.

• **Low Maintenance Condenser**


Imbera's finless condenser designed to minimize maintenance. Drastically reduces Total Cost of Ownership. Prevents dust that blocks air flow, to save energy and extend the life of the compressor.

ESTABLISHING A **NEW STANDARD** IN THE COMMERCIAL REFRIGERATION INDUSTRY.


PRODUCT VIEWS



TOP VIEW

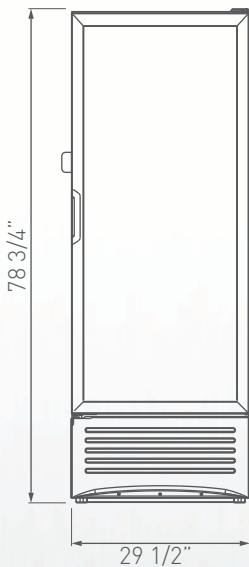

FRONT VIEW

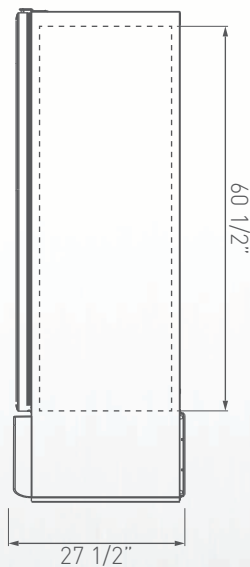

SIDE VIEW

Warranty:

Three year limited warranty on all parts and labor, an additional two year warranty on compressor. (USA and Canada only)

Dimensions rounded up to the nearest inch or millimeter. Specifications subject to change without notice.

Customer Service: 866-363-0079 | WWW.IMBERAFOODSERVICE.COM

TECHNICAL SPECIFICATIONS

Exterior Dimensions	W:	29 1/2"	750 mm
	D:	27 1/2"	700 mm
	H:	78 3/4"	2000 mm

Exterior Dimensions (w/lock)	W:	30 5/8"	777 mm
	D:	27 1/2"	700 mm
	H:	78 3/4"	2000 mm

Interior Dimensions	W:	25 1/2"	649 mm
	D:	21 3/8"	542 mm
	H:	60 1/2"	1536 mm

Dimensions w/packaging	W:	32 1/4"	820 mm
	D:	29 7/8"	760 mm
	H:	82 5/8"	2100 mm

Shelf Size	W:	24 3/4"	630 mm
	D:	19 5/8"	497 mm

Weight	223.8 Lbs	101.5 kg
Weight w/packaging	240.4 Lbs	109.1 kg

Shelves	5
----------------	---

Capacity 20oz.	Flat:	240
	Gravity:	240

REFRIGERATION DATA

Energy Consumption	3.040 kWh/day
---------------------------	---------------

Voltage	115/60
----------------	--------

Horse Power	1/4+
--------------------	------

AMPS	5.2
-------------	-----

LOGISTIC

Trailer Loads	40':	42
	53':	60

Certifications	UL:	✓
	ES:	✓
	UL/EPH:	✓

* Energy consumption based on ANSI/ASHRAE Standard 72-2005.

BMAD System (Low maintenance high performance).
Dimensions rounded up to the nearest inch or millimeter.
Specifications subject to change without notice.

ESTABLISHING A **NEW STANDARD** IN THE COMMERCIAL REFRIGERATION INDUSTRY.

HEALTH LOCKING, ALLOWS TO **LOCK** THE COOLER IF THE CONSUMPTION TEMPERATURE IS **ABOVE** OF 41.9°F.



KEY FEATURES

- **Co-developing with Triteq,**

 - Designed and manufactured by Triteq
 - Compatible with any Triteq key and Auto Traq

- **Primary functions and capability,**

 - Automatically locks when lock-out is required.
 - Can be locked and unlocked independent of health timer.
 - Electronic key for safety and tamper proof.
 - Customizable alerts on lock activity
 - Communications capability. (fee applies)

- **Health lock,**

 - The product will remain under 41.9°F, if it goes above this temperature during more than 15 minutes the cooler will be locked.

- **Certifications,**

 - NAMA ✓
 - UL ✓

