

ESTABLISHING A **NEW STANDARD** IN THE COMMERCIAL REFRIGERATION INDUSTRY.

WITH ITS LARGE CAPACITY, THIS FREEZER PRESERVES YOUR FROZEN PRODUCT WHILE PROVIDING A BEAUTIFUL DISPLAY.




KEY FEATURES

- **BMAD Refrigeration System**
Ensures rapid and effective cabinet cool down and maintains consistent temperature range with minimum energy consumption
- **Intelligent Control System CIF**
This intelligent control efficiently manages cooler temperatures based on surrounding conditions and self-adjusts to the correct temperature at any given time.
- **High Efficiency Glass Door**
Equipped with double panel glass and low-e film to reduce condensation. Door hinge is equipped with a self-closing system to ensure the door closes safely, and returns to original position, without any damages.
- **LED Lighting System**
Our LED system uses a fraction of the energy of regular fluorescent lights and requires no replacement for up seven years.
- **CFC and HFC Free Cyclopentane Foam**
Eco-friendly, recyclable and high efficiency cabinet insulation.
- **Electronic Fan Motors**
Enhances performance and efficiency. Uses only a fraction of the energy than industry standard shaded-pole motor requires. Longer lifespan fan motor.


NAMA

ESTABLISHING A **NEW STANDARD** IN THE COMMERCIAL REFRIGERATION INDUSTRY.


PRODUCT VIEWS



TOP VIEW

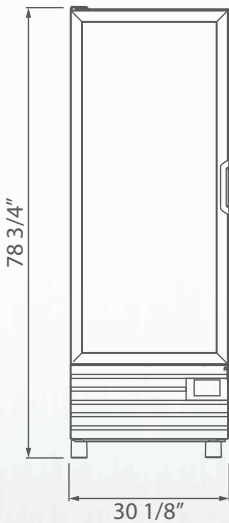

FRONT VIEW

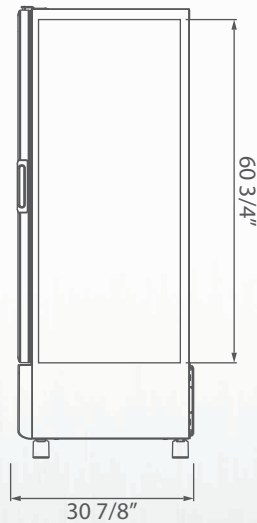

SIDE VIEW

TECHNICAL SPECIFICATIONS

Exterior Dimensions	W:	30 1/8"	765 mm
	D:	30 7/8"	785 mm
	H:	78 3/4"	2000 mm
Interior Dimensions	W:	26 1/2"	672 mm
	D:	25 3/8"	646 mm
	H:	60 3/4"	1544 mm
Dimensions w/packaging	W:	32 1/4"	820 mm
	D:	29 7/8"	760 mm
	H:	82 5/8"	2100 mm
Shelf Size	W:	25 3/4"	653 mm
	D:	21 1/4"	541 mm
Weight		378.0 Lbs	171.0 kg
Weight w/packaging		394.6 Lbs	179.0 kg
Shelves		5	

REFRIGERATION DATA

Energy Consumption	10.220 kWh/day	
Voltage	115/60	
Horse Power	3/4	
AMPS	7.0	
Certifications	UL:	✓
	ES:	✓
	UL/EPH:	✓

* Energy consumption based on ANSI/ASHRAE Standard 72-2005.

BMAD System (Low maintenance high performance).
Dimensions rounded up to the nearest inch or millimeter.
Specifications subject to change without notice.

Warranty:
Three year limited warranty on all parts and labor, an additional two year warranty on compressor. (USA and Canada only)

Dimensions rounded up to the nearest inch or millimeter.
Specifications subject to change without notice.

Customer Service: 866-363-0079 | WWW.IMBERAFOODSERVICE.COM

ESTABLISHING A **NEW STANDARD** IN THE COMMERCIAL REFRIGERATION INDUSTRY.

HEALTH TIMER ENSURES COOLER WILL LOCK IF CONSUMPTION TEMPERATURE REMAINS ABOVE 41.9°F FOR LONGER THAN 15 MINUTES.



KEY FEATURES

- **Triteq Fresh IQ lock**
 - Designed and manufactured by Imbera and Triteq, leaders in intelligent freezers and vending security solutions.
 - Compatible with any Triteq or P1 key and AutoTraq
- **Primary functions and capability**
 - Automatically locks when consumer protection is required.
 - Automatically locks when a temperature probe failure is detected.
 - Automatically locks within 2 minutes of AC power loss, and remains locked if power is not restored before a Temp lock-out event. After AC power is restored, device will automatically unlock if Temp Lock-out did not occur.
 - Can be locked and unlocked independently of health timer.
 - Tamperproof electronic key for safety.
 - Alerts for lock activity.
- **Health lock**
 - Prevents from dispensing food that is not at a safe temperature.
 - Health timer ensures that lock will be engaged if temperature remains above 0.4°F for longer than 15 minutes.

• Certifications,

- UL ✓
- NAMA ✓

An easy access, hidden test switch is provided for compliance with Health Department inspection procedures.

